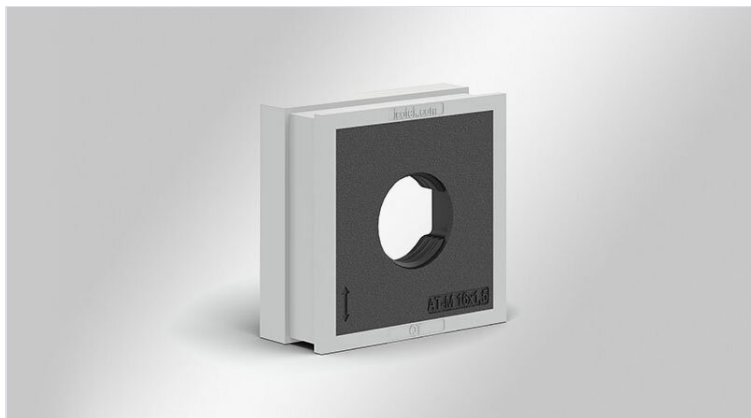


# QT-AT-M | QT-AT-K-M adaptertulen

met binnendraad M5 - M25 / IP54



IP54

HL3  
EN 45545-2

ECOLAB  
certified

UV  
ISO 4892-2A

PNEUMATICS

RoHS  
compliant

REACH  
COMPLIANCE

Made in  
Germany



WE  
CONTROL  
COMPONENTS

[Bestel direct online @ CC Nederland »](#)



[Voor aanvragen uit België klik hier »](#)

QT-AT-M is an adapter grommet (based on large QT grommets) with integrated metric threads. The QT-AT-M adapter grommets are made of elastomer with a polyamide body. QT-AT-M adapter grommets are available with inner threads M12 x 1.0, M16 x 1.5, M20 x 1.5 and M25 x 1.5.

The QT-AT-M is ideal for creating an interface for signal, data, power or hybrid connectors by simply screwing them into the QT-AT-M thread. Pressure compensation elements or hose glands up to M25 x 1.5 can also be screwed into the QT-AT-M.

icotek also offers screw plugs for sizes M16, M20 and M25 to close the new adapter grommet with the metric internal thread QT-AT-M.

QT-AT-K-M is an adapter grommet (based on small QT grommets) with integrated metric threads, suitable for split icotek cable entry systems. The QT-AT-K-M adapter grommets are made of elastomer with a nickel-plated brass body. QT-AT-K-M adapter grommets are available with inner threads M5 x 0.5, M8 x 1.0, M12 x 1.0 and M12 x 1.5.

By using the QT-AT-K-M adapter grommet several connectors can be inserted directly into the cable entry frame e.g. pneumatic bulkhead connectors M12 x 1,0, metric connectors and pressure compensation elements.

They are compatible with all split [KEL-QUICK cable entry systems](#) (suitable for QT cable grommets).

## Specificaties


<b>IP-classificatie (EN 60529)</b>	IP54
<b>Materiaal</b>	Elastomeer Basisframe: Polyamide
<b>Vlam klasse</b>	UL94-V0, zelfdovend
<b>Temperatuur</b>	-40 C° tot 100 C°
<b>Eigenschappen</b>	zonder siliconen, halogeenvrij

## Voordelen

- Connectoraansluitingen kunnen rechtstreeks in het kabelinvoersysteem worden geïntegreerd
- Aparte uitsparingen voor connectoren zijn niet meer nodig
- Ruimtebesparende oplossing

## Producttypes en maten


QT-AT-K-M M5 x 0,5



Art.nr.	<b>42604</b>
EAN	<b>4251269323423</b>
Aantal	<b>5</b>
Schroefdraad	<b>M5 x 0,5</b>
Lengte	<b>20 mm</b>
Breedte	<b>19 mm</b>
Hoogte	<b>12 mm</b>


Montage hoogte

**2 mm**

**QT-AT-K-M M8 × 1.0**


Art.nr. **42605**  
 EAN **4251269323430**  
 Aantal **5**  
 Schroefdraad **M8 × 1,0**  
 Lengte **20 mm**  
 Breedte **19 mm**  
 Hoogte **12 mm**

Montage hoogte **2 mm**

**QT-AT-K-M M8 × 0.5**


Art.nr. **42609**  
 EAN **4251269323829**  
 Aantal **5**  
 Schroefdraad **M8 × 0,5**  
 Lengte **20 mm**  
 Breedte **19 mm**  
 Hoogte **12 mm**

Montage hoogte **2 mm**

**QT-AT-K-M M12 × 1.0**


Art.nr. **42606**  
 EAN **4251269323447**  
 Aantal **5**  
 Schroefdraad **M12 × 1,0**  
 Lengte **20 mm**  
 Breedte **19 mm**  
 Hoogte **12 mm**

Montage hoogte **2 mm**

**QT-AT-K-M M12 × 1.5**


Art.nr. **42607**  
 EAN **4251269323454**  
 Aantal **5**  
 Schroefdraad **M12 × 1,5**  
 Lengte **20 mm**  
 Breedte **19 mm**  
 Hoogte **12 mm**

Montage hoogte **2 mm**

**QT-AT-M 12 × 1.0**


Art.nr. **42596**  
 EAN **4251269322952**  
 Aantal **10**  
 Schroefdraad **M12 × 1,0**  
 Lengte **40 mm**  
 Breedte **39 mm**  
 Hoogte **19**

Montage hoogte **2**

**QT-AT-M 16 × 1.5**

Art.nr. **42597**  
 EAN **4251269322969**  
 Aantal **10**  
 Schroefdraad **M16 × 1,5**  
 Lengte **40 mm**  
 Breedte **39 mm**  
 Hoogte **19**


Montage hoogte **2**

**QT-AT-M 20 × 1.5**

Art.nr. **42598**  
 EAN **4251269322976**  
 Aantal **10**  
 Schroefdraad **M20 × 1,5**  
 Lengte **40 mm**  
 Breedte **39 mm**  
 Hoogte **19**

Montage hoogte **2**

QT-AT-M 25 × 1,5



Art.nr.  
EAN  
Aantal  
Schroefdraad  
Lengte  
Breedte  
Hoogte

**42599**  
**4251269322983**  
**10**  
**M25 × 1,5**  
**40 mm**  
**39 mm**  
**19**

Montage hoogte

**2**

---

**icotek**<sup>®</sup>  
smart cable management